


**HOW TO SPECIFY**

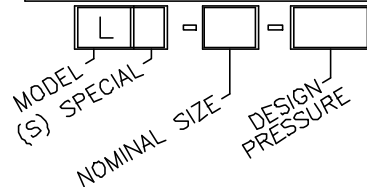

|                       |                   |               |
|-----------------------|-------------------|---------------|
| AVAILABLE CONNECTIONS | DRAIN: _____      | VENT: _____   |
|                       | SYPHON: _____     | L.L.C.: _____ |
|                       | INSPECTION: _____ |               |
|                       | OTHERS: _____     |               |

| STANDARD MATERIALS |                        | COMMENTS |
|--------------------|------------------------|----------|
| HEADS              | SA-516-70              |          |
| SHELL              | SA-106-B/C / SA-516-70 |          |
| FLANGES            | SA-105                 |          |
| FITTINGS           | SA-105                 |          |
| PIPE               | SA-106-B/C             |          |
| SUPPORTS           | SA-36 / SA-285         |          |
| ELEMENT            | 316L SS                |          |

**NOTES:**

- DESIGNED, FABRICATED AND STAMPED IN ACCORDANCE WITH ASME CODE SECTION VIII, DIVISION I.
- SEPARATION ELEMENTS AVAILABLE IN CARBON STEEL, 304-L & 316-L STAINLESS STEEL, OPTIONAL ALLOYS UPON REQUEST.
- OPTIONAL SKIRT AND BASE, ANGLE LEGS, OR SUPPORT LUGS AVAILABLE UPON REQUEST.
- SPECIAL MATERIALS, CONFIGURATIONS, AND HIGHER DESIGN PRESSURES AVAILABLE UPON REQUEST.
- ALL SIZES ARE RATED FOR 150 PSIG @ 500 F, OR 300 PSIG @ 500 F
- ALL DIMENSIONS ARE IN INCHES.

A.S.M.E. CODE STAMPS



| MODEL L- | SIZE                 |                   | 150 AND 300 PSIG MODELS |            |             |        |                 |                 |
|----------|----------------------|-------------------|-------------------------|------------|-------------|--------|-----------------|-----------------|
|          | VESSEL DIAMETER (IN) | INLET/OUTLET (IN) | LENGTH (IN)             | VENT (NPT) | DRAIN (NPT) | A (IN) | WEIGHT 150 LBS. | WEIGHT 300 LBS. |
| L-2½     | 6-5/8" OD            | 2-1/2"            | 19                      | ½          | 1           | 7 5/8  | 51              | 54              |
| L-3      | 8-5/8" OD            | 3"                | 22                      | ½          | 1½          | 8 5/8  | 75              | 84              |
| L-4      | 10-3/4" OD           | 4"                | 26                      | ½          | 1½          | 9 ½    | 110             | 140             |
| L-5      | 12-3/4" OD           | 5"                | 30                      | ½          | 2           | 10 ½   | 162             | 200             |
| L-6      | 14" OD               | 6"                | 34                      | ½          | 2           | 12     | 175             | 234             |
| L-8      | 16" OD               | 8"                | 44                      | ¾          | 2           | 16     | 272             | 412             |
| L-10     | 20" OD               | 10"               | 52                      | ¾          | 2 ½         | 19 ½   | 462             | 724             |
| L-12     | 24" OD               | 12"               | 66                      | ¾          | 2 ½         | 23     | 776             | 848             |

