


HOW TO SPECIFY

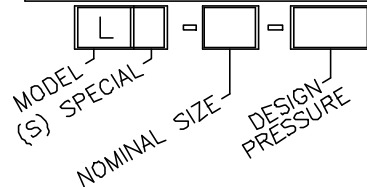

AVAILABLE CONNECTIONS	DRAIN: _____	VENT: _____
	SYPHON: _____	L.L.C.: _____
	INSPECTION: _____	
	OTHERS: _____	

STANDARD MATERIALS		COMMENTS
HEADS	SA-516-70	
SHELL	SA-106-B/C / SA-516-70	
FLANGES	SA-105	
FITTINGS	SA-105	
PIPE	SA-106-B/C	
SUPPORTS	SA-36 / SA-285	
ELEMENT	316L SS	

NOTES:

- 1.) DESIGNED, FABRICATED AND STAMPED IN ACCORDANCE WITH ASME CODE SECTION VIII, DIVISION I.
- 2.) SEPARATION ELEMENTS AVAILABLE IN CARBON STEEL, 304-L & 316-L STAINLESS STEEL, OPTIONAL ALLOYS UPON REQUEST.
- 3.) OPTIONAL SKIRT AND BASE, ANGLE LEGS, OR SUPPORT LUGS AVAILABLE UPON REQUEST.
- 4.) SPECIAL MATERIALS, CONFIGURATIONS, AND HIGHER DESIGN PRESSURES AVAILABLE UPON REQUEST.
- 5.) ALL SIZES ARE RATED FOR 150 PSIG @ 500 F, OR 300 PSIG @ 500 F
- 6.) ALL DIMENSIONS ARE IN INCHES.

A.S.M.E. CODE STAMPS



MODEL L-	SIZE		150 AND 300 PSIG MODELS					
	VESSEL DIAMETER (IN)	INLET/OUTLET (IN)	LENGTH (IN)	VENT (NPT)	DRAIN (NPT)	A (IN)	WEIGHT 150 LBS.	WEIGHT 300 LBS.
L-2½	6-5/8" OD	2-1/2"	19	½	1	7 5/8	51	54
L-3	8-5/8" OD	3"	22	½	1½	8 5/8	75	84
L-4	10-3/4" OD	4"	26	½	1½	9 ½	110	140
L-5	12-3/4" OD	5"	30	½	2	10 ½	162	200
L-6	14" OD	6"	34	½	2	12	175	234
L-8	16" OD	8"	44	¾	2	16	272	412
L-10	20" OD	10"	52	¾	2 ½	19 ½	462	724
L-12	24" OD	12"	66	¾	2 ½	23	776	848

