

FIGURE 1

REMOVE POWER FROM THE RST-2 TRANSMITTER AND THEN REMOVE HOUSING COVER. REED BOARD SHOULD BE POSITIONED, IF NEEDED, IN SUCH A WAY SO THAT IT IS IN-LINE WITH THE CENTERLINE OF THE MAG CHAMBER (SEE FIG.1). AFFIX THE BRACKET OVER THE END OF THE REED BOARD AS SHOWN IN FIG.2, ONCE IN PLACE. REPLACE COVER WHEN FINISHED AND RETURN POWER TO THE TRANSMITTER.

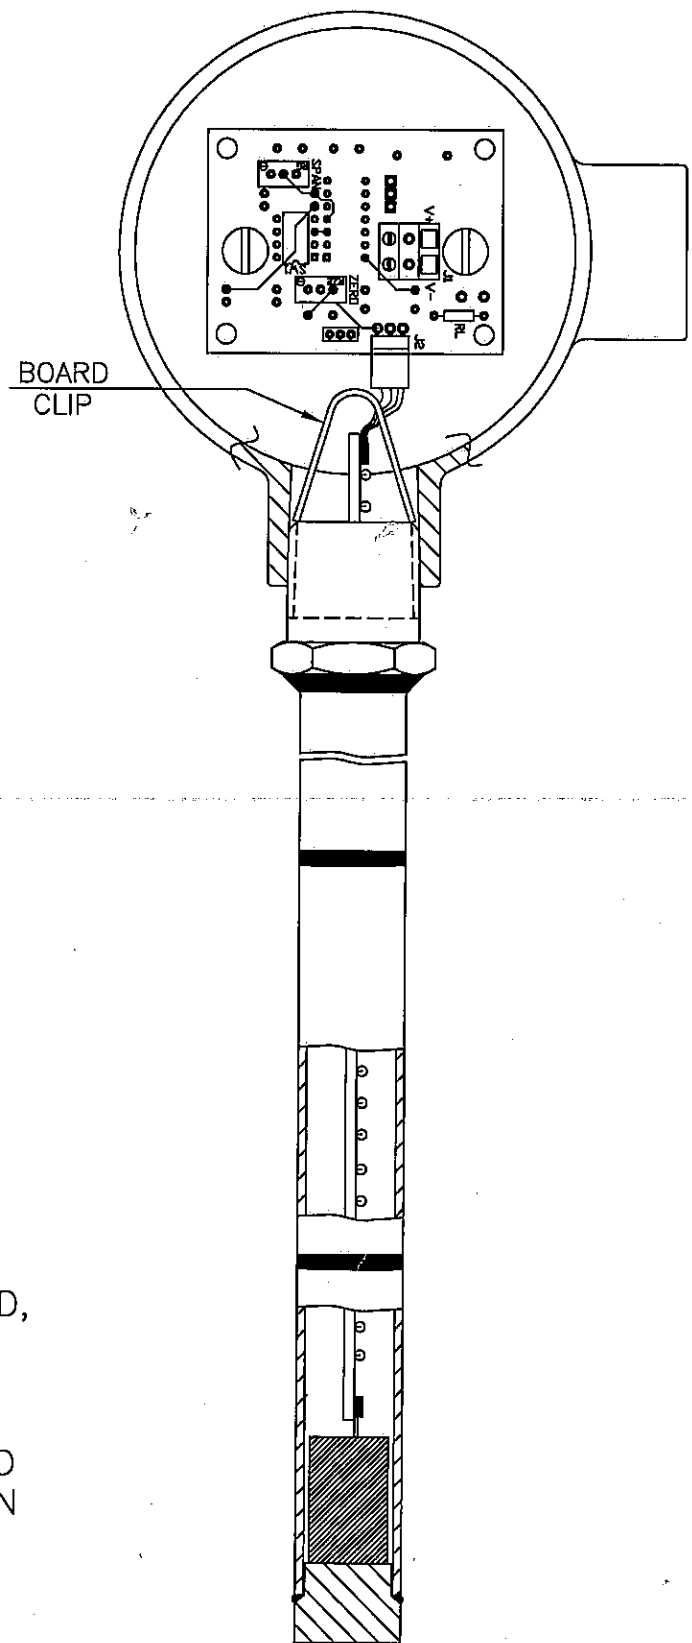


FIGURE 2