

16433 Foltz Pkwy Strongsville, Ohio 44149 Telephone: (440) 572-1500 Fax: (440) 572-0900
www.clark-reliance.com



Q055 – 0250 – B – 1


Element Type/Dimensions

Center Core Material

Absolute Micron Rating


Gasket Material

Filtration Efficiency Rating: ISO 16889

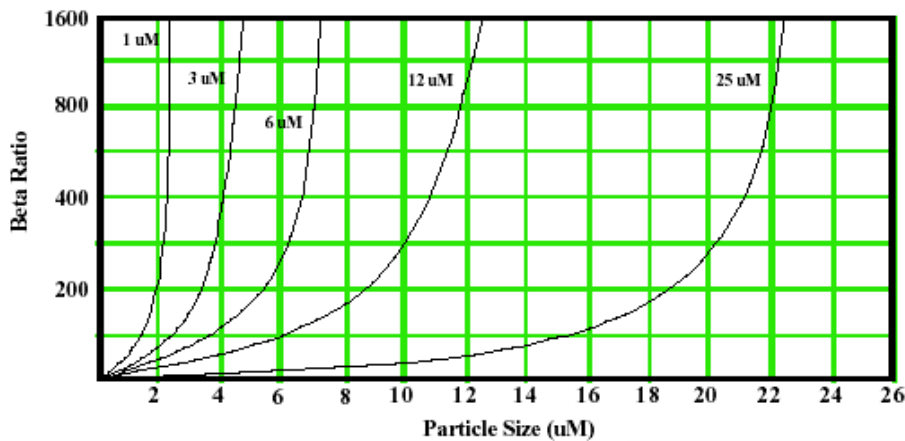

Performance Data

Flow direction: Outside-Inside
 Filter area: 3.4 ft²
 Recommended Changeout: 25 PSID
 Collapse: 80 PSID
 Temperature, max: 200 °F
 Temperature, min: -20 °F

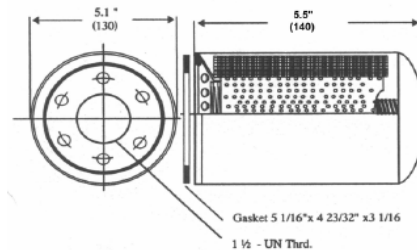

Material of Construction

Media: Pleated Microglass
 Hardware: Steel, enamel coating
 Bond material: Epoxy

Packaging

Quantity per carton: 1
 Weight per carton: 3 lbs

