

MATERIAL: SEE B/M
 DRAWN: TFK
 SCALE: NONE
 CHECKED: DEP
 DATE: 9/15/95



SIGHT FLOW INDICATOR
 4000-S


Section: T400
 Bulletin: T400.41
 Date: 09/01/93
 Supersedes: 12/01/90

VARIOUS PRESSURES

FILE NO.: T400-41.DWG

THIS DRAWING AND ALL INFORMATION ON IT IS THE PROPERTY OF JACOBY-TARBOX, DIVISION OF THE CLARK-RELANCE CORPORATION. IT IS CONFIDENTIAL AND IS GIVEN TO YOU FOR A LIMITED PURPOSE AND MUST BE RETURNED UPON REQUEST. NEITHER THIS DRAWING NOR ANY PART OF IT NOR ANY INFORMATION CONCERNING IT MAY BE COPIED, EXHIBITED OR FURNISHED TO OTHERS NOR MAY PHOTOGRAPHS BE TAKEN OF ANY ARTICLE FABRICATED OR ASSEMBLED FROM THIS DRAWING WITHOUT CONSENT OF THE CLARK-RELANCE CORPORATION.

STYLE 4000-S

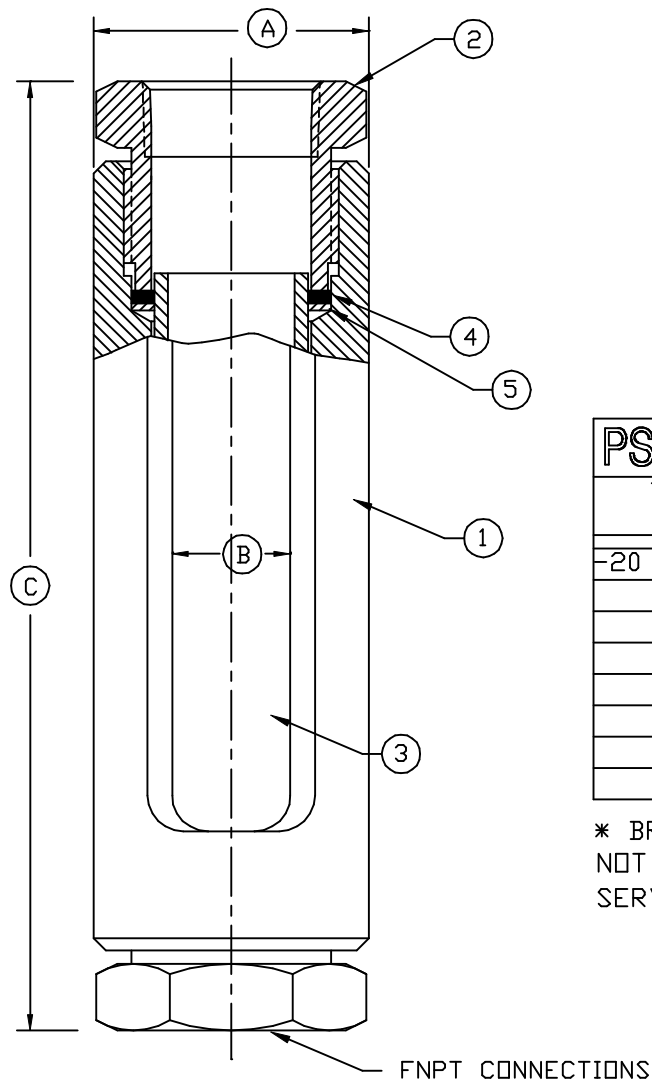

PARTS LIST				
PIECE NO.	NAME OF PART	QUAN.	MATERIAL	COMMENTS
1	BODY	1	BRONZE	
2	HEAD	2	SEE BELOW	
3	CYLINDER	1	ANN. BOROSILICATE	
4	GASKET **	2		
5	GASKET SUPPORT	2	BRONZE	

**NOTE: AVAILABLE W/ NEOPRENE STANDARD, VITON, SILICONE, AND TEFLON ENVELOPE WITH ONE OF THE ABOVE AS AN INSERT

PSIG/TEMP RATINGS	
TEMP F	ALL MATERIALS* 1/8 TO 1-1/2
-20 TO 100	150
150	150
200	150
250	150
300	150
350	150
400	150
450	150

* BRONZE AND CAST IRON NOT RECOMMENDED FOR SERVICE ABOVE 400°F

STANDARD DESIGN MATERIALS:

- HEAD: ASTM A216-WCB (CARBON STEEL)
- ASTM A351-CF8M (316 SS)
- ASTM B62 (BRONZE)
- ASTM A126 CLASS B (CAST IRON)

BODY: ASTM B62 (BRONZE)

*BODY IS NOT A WETTED COMPONENT

GASKET SUPPORT: BRASS UNS C36000 H02

INDICATOR: N/A

OPTIONAL ALLOYS FURNISHED UPON REQUEST

PIPE SIZE	DIMENSIONS						APPROX. WGT.		PRESSURE RATING	
	A		B		C		LBS.	KGS.	PSIG	BAR
	IN.	mm	IN.	mm	IN.	mm				
1/8	1.50	38	.75	19	4.88	124	1	.45	150	10.3
1/4	1.50	38	.75	19	4.88	124	1	.45	150	10.3
3/8	1.50	38	.75	19	4.88	124	1	.45	150	10.3
1/2	1.75	45	1.00	25	6.00	152	2	.91	150	10.3
3/4	2.00	51	1.25	32	6.62	168	2.5	1.1	150	10.3
1	2.00	51	1.25	32	6.62	168	2.5	1.1	150	10.3
1-1/4	2.88	73	1.75	45	8.88	226	6	2.7	150	10.3
1-1/2	2.88	73	1.75	45	8.88	226	6	2.7	150	10.3